



INSTALLATION INSTRUCTIONS


Accessory
KNUCKLE GUARD EXTENSIONS
 P/N 08P72-MKS-E00

Application
CRF1100A/D

Publication No.
MII
 Issue Date
April 2021

Honda Dealer: Please give a copy of these instructions to your customer.

PARTS LIST

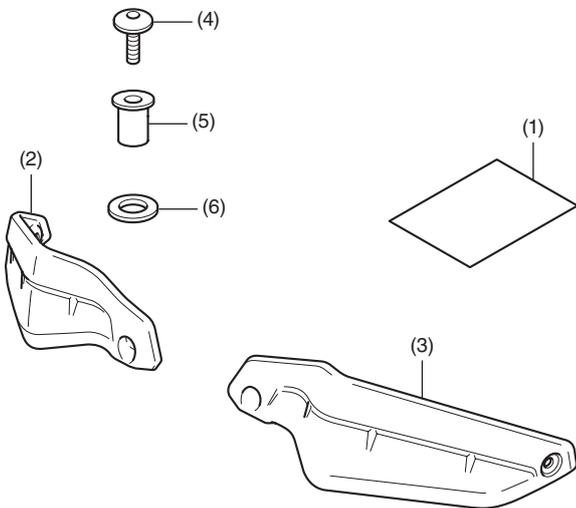

No.	Description	Qty
(1)	URL paper	1
(2)	Right knuckle guard B	1
(3)	Left knuckle guard B	1
(4)	5 mm screw	2
(5)	Well nut	2
(6)	Washer	2

TOOLS REQUIRED

Hex wrench (5 mm)
 Torque wrench


TORQUE CHART

Tighten all screws, bolts, and nuts to their specified torque values. Refer to the Service Manual for the torque values of the removed parts.


Item	N·m	kgf·m	lbf·ft
5 mm screw	0.4	0.04	0.3

INSTALLATION


1. Remove the screw as shown.
 <Left side>

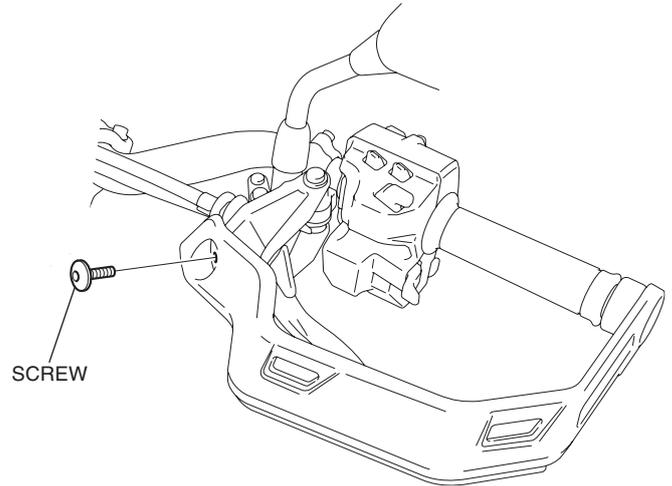

2. Install the well nut as shown.

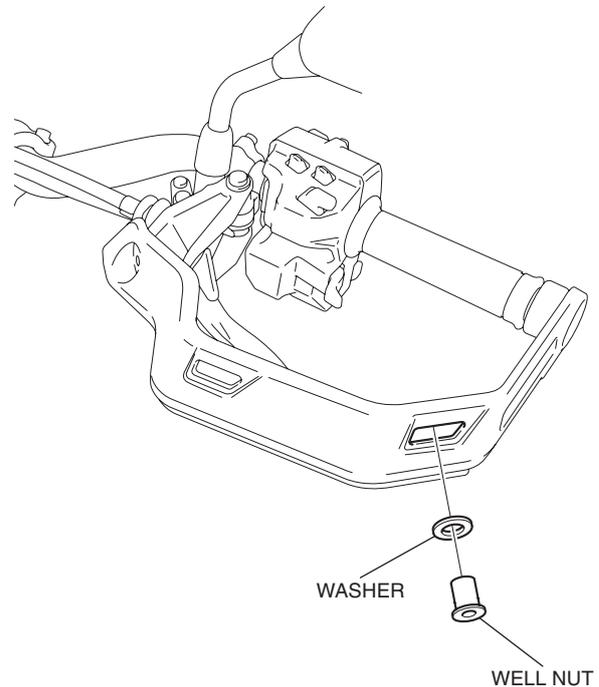

3. Install the left knuckle guard B as shown.

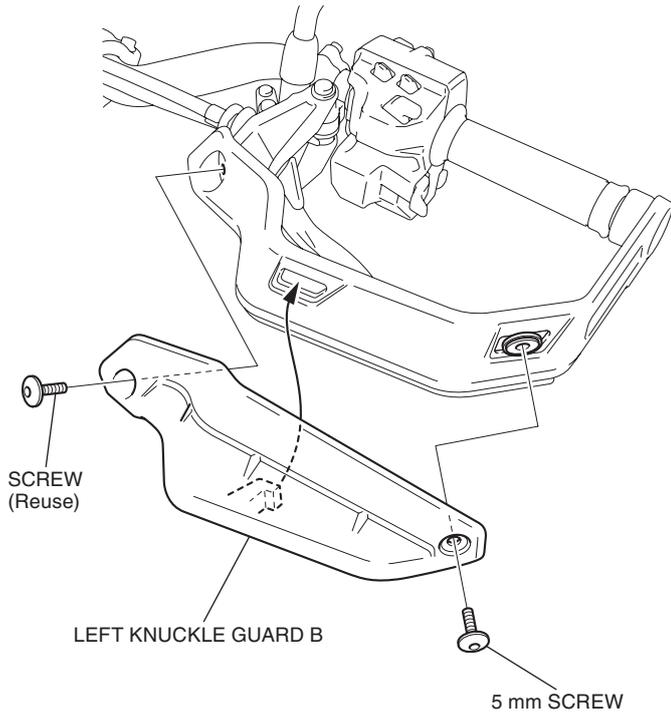

4. Install the right knuckle guard B in the same manner as the left side.