



INSTALLATION INSTRUCTIONS


Accessory	Application	Publication No.
TANK PAD P/N 08P70-MGH-J20	CB500XA	MII
		Issue Date
		October 2018

Accessory	Application	Publication No.
TANK PAD P/N 08P70-MGH-J20	CB500XA	MII
		Issue Date
		October 2018

Accessory	Application	Publication No.
TANK PAD P/N 08P70-MGH-J20	CB500XA	MII
		Issue Date
		October 2018

Honda Dealer: Please give a copy of these instructions to your customer.

PARTS LIST

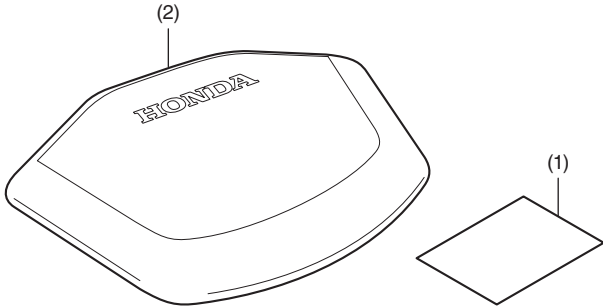

No.	Description	Qty
(1)	URL paper	1
(2)	Tank pad	1

SUPPLIES REQUIRED


- Scale
- Isopropyl alcohol
- Shop towel

INSTALLATION


NOTE:

- Heat the bonding surfaces with a hair dryer if the ambient air temperature is below 70°F (21°C).
- The adhesive reaches full strength in 72 hours. Wait at least 24 hours before riding your motorcycle.



- Clean the surface of the area shown using an isopropyl alcohol.

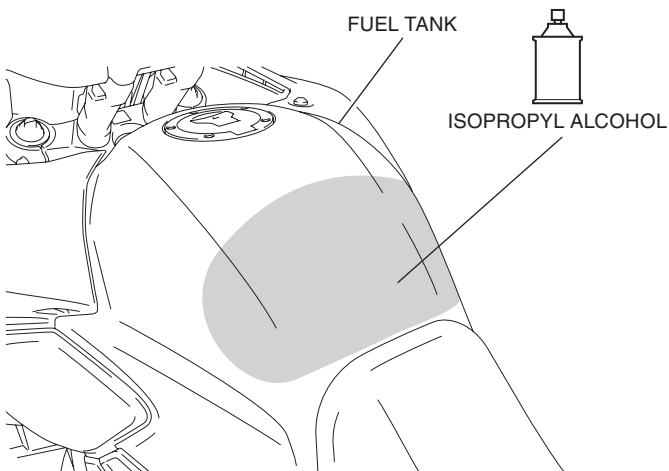

- Peel off the adhesive backing on the tank pad as shown.

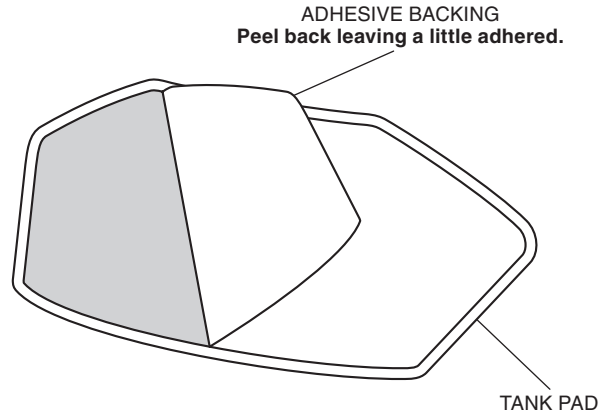

- Attach the tank pad and remove the adhesive backing as shown.

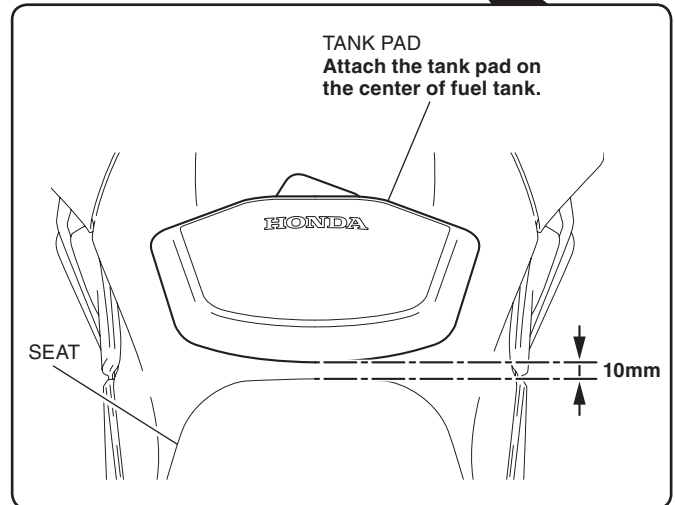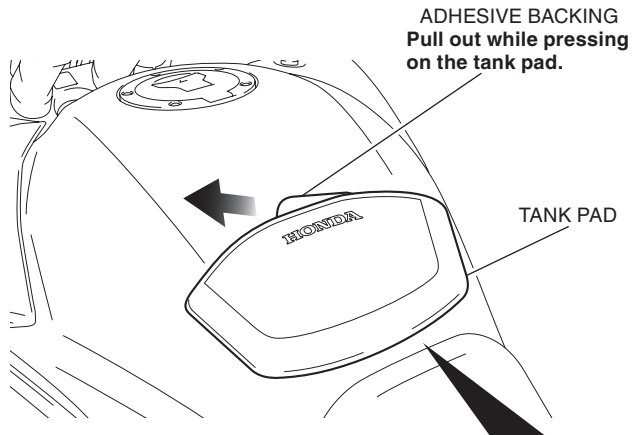

- Apply adequate pressure to the attached tank pad.