

# SEAT BAG ATTACHMENT

Accessory Name	Parts Number	Application Model	Issue Date	Publication No.	FRT
REAR SEAT BAG	08L73-MKJ-D00	CB750A	2022.10	MII	0.3 H
SEAT BAG ATTACHMENT	08L70-MKP-T00				
PROTECTIVE FILM	08P71-MLB-D00				

### Introduction

ALL INFORMATION, ILLUSTRATIONS, DIRECTIONS AND SPECIFICATIONS INCLUDED IN THIS PUBLICATION ARE BASED ON THE LATEST PRODUCT INFORMATION AVAILABLE AT THE TIME OF APPROVAL FOR PRINTING. Honda Motor Co., Ltd. RESERVES THE RIGHT TO MAKE CHANGES AT ANY TIME WITHOUT NOTICE AND WITHOUT INCURRING ANY OBLIGATION WHATSOEVER. NO PART OF THIS PUBLICATION MAY BE REPRODUCED WITHOUT WRITTEN PERMISSION. THIS MANUAL IS WRITTEN FOR PERSONS WHO HAVE ACQUIRED BASIC KNOWLEDGE OF MAINTENANCE ON Honda MOTORCYCLES, MOTOR SCOOTERS OR ATVS.

Honda Dealer:

Please give a copy of these instructions to your customer.

Customer:

Because it requires specialized knowledge and special tools and equipment, it is recommended to install it at a dealer with qualified automobile maintenance.

### How To Read These Symbols

Your safety, and the safety of others, is very important. To help you make informed decisions we have provided safety messages and other information throughout this manual.

-  **WARNING** You CAN be KILLED or SERIOUSLY HURT if you don't follow instructions.
-  **CAUTION** You CAN be HURT if you don't follow instructions.
-  **NOTICE** The purpose of this message is to help prevent damage to your vehicle, other property, or the environment.
-  **NOTE** Things you want to know, things that are useful to know.
-  Follow the instructions of the Service Manual.
-  Follow the other symbol instructions of the "Installation Instructions BASIC".

Instruction Other Symbols

The symbols used throughout this instructions show specific service procedures. Refer to "Installation Instructions BASIC" for description of each symbol.

## INFORMATION

### CAUTION

- To prevent burns, allow the engine, exhaust system, radiator, etc., to cool before installing the accessory.

### NOTICE

- Take care not to damage the painted surfaces of the motorcycle.

NOTE:

- Save all removed parts unless otherwise indicated.

## MAXIMUM LOADING CAPACITY

- The weight of the cargo must not exceed the following maximum loading capacity:

Maximum Loading Capacity	
Rear seat bag	4.0 kg (8.8 lb)


## PARTS LIST

When the instruction manual and installation instructions are included in this kit, be sure to give them to the customer.


### <REAR SEAT BAG>

Component	No.	Parts Name	Qty	Parts No.
	(1)	Rear seat bag	1	—

### <SEAT BAG ATTACHMENT>

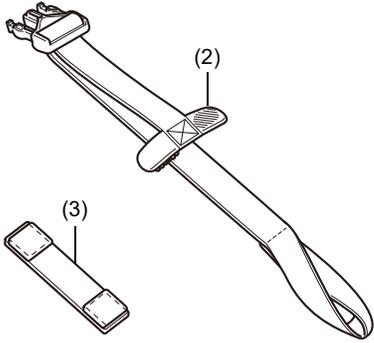Component	No.	Parts Name	Qty	Parts No.
	(2)	Seat bag strap	4	—
	(3)	Protective belt	2	—

### <PROTECTIVE FILM>

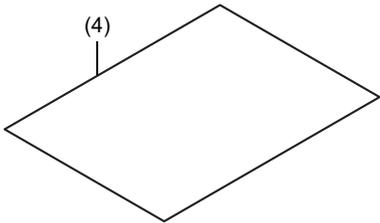
Component	No.	Parts Name	Qty	Parts No.
	(4)	Protective film	1	—

## TORQUE INFORMATION


Refer to the Service Manual for the torque values including standard torque of the removed parts. (🔧)

# INSTALLATION


1. Refer to the Service Manual for motorcycle, remove the motorcycle parts as shown. (📖)

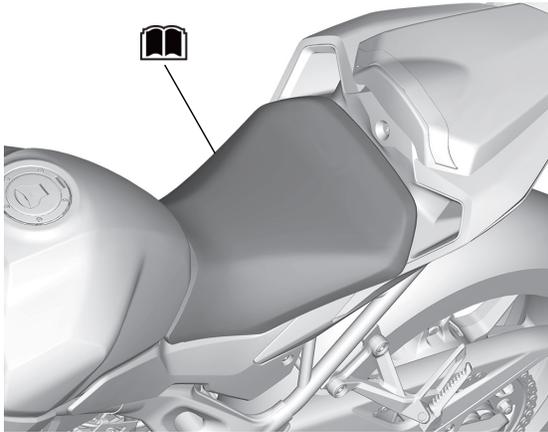


INSTALLATION IMAGE

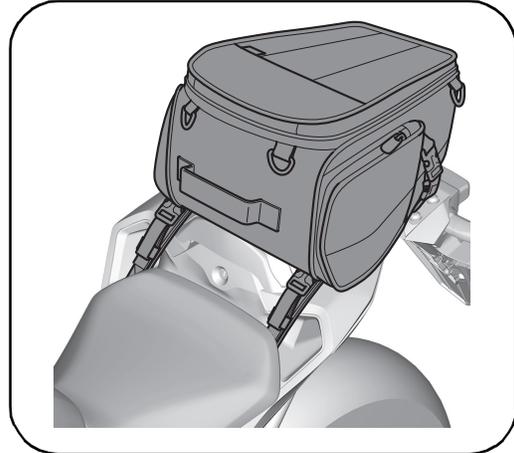


2. Cut the protective film to the dimensions shown.

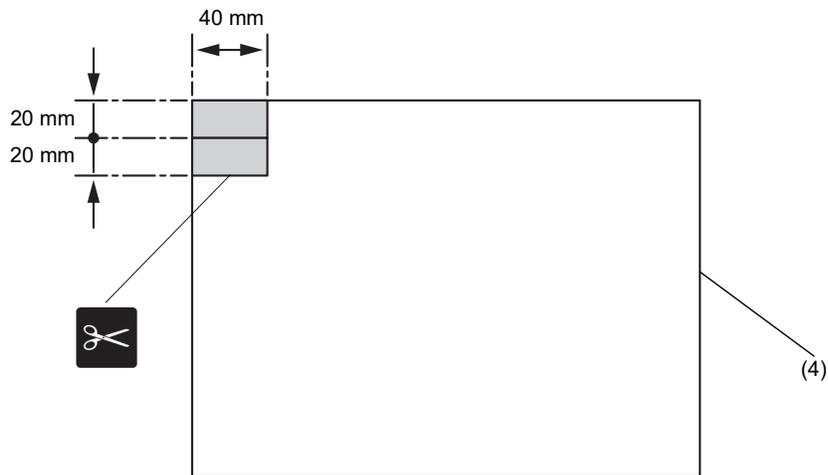


3. Install as shown.

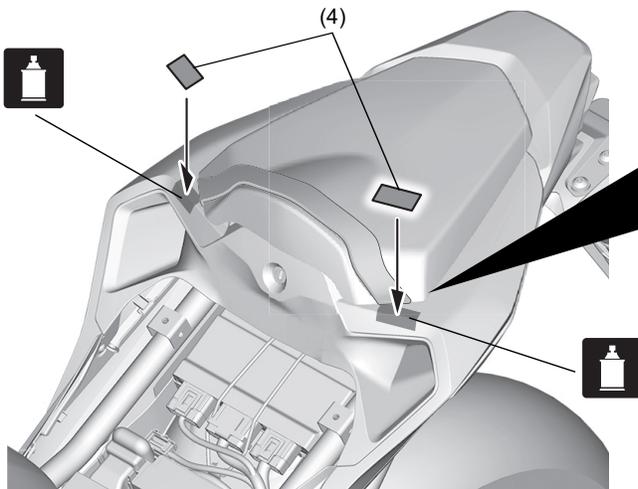



Repeat on the right side in the same manner as the left side.

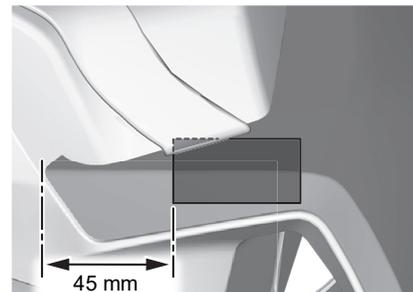



4. Install as shown.  
• Repeat on the right side.

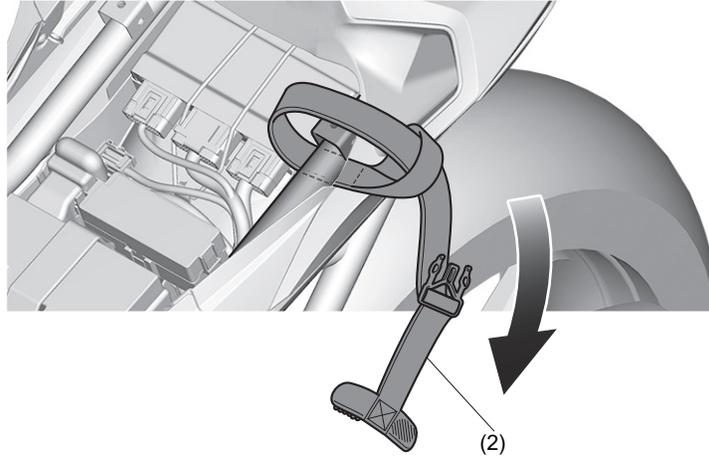

5. Install as shown.

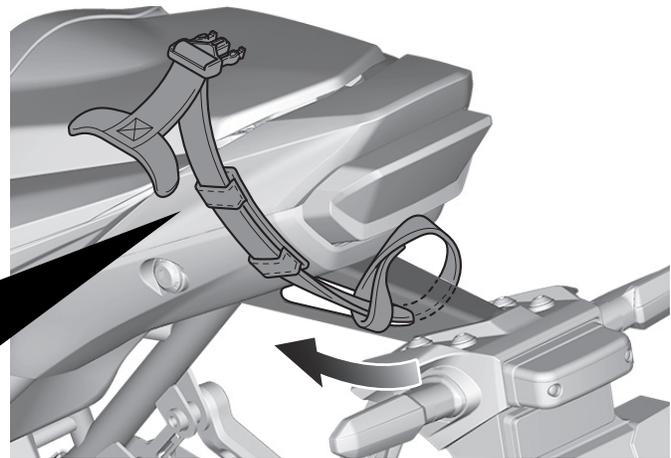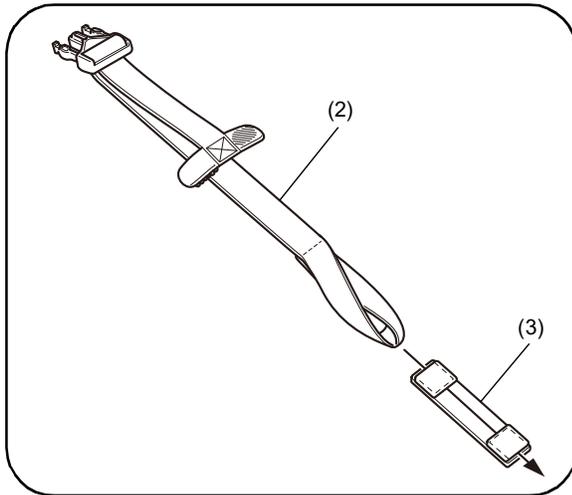


6. Install as shown.

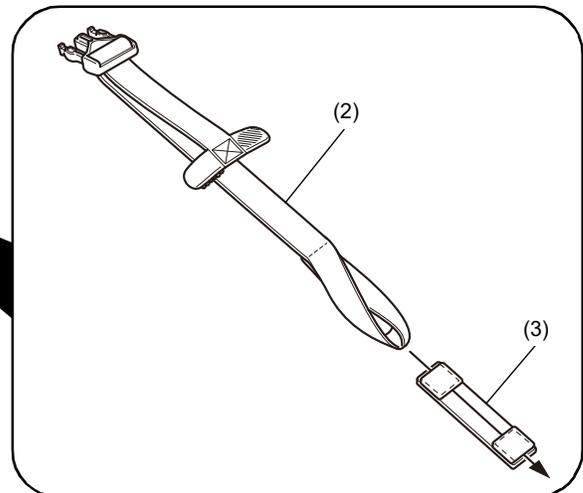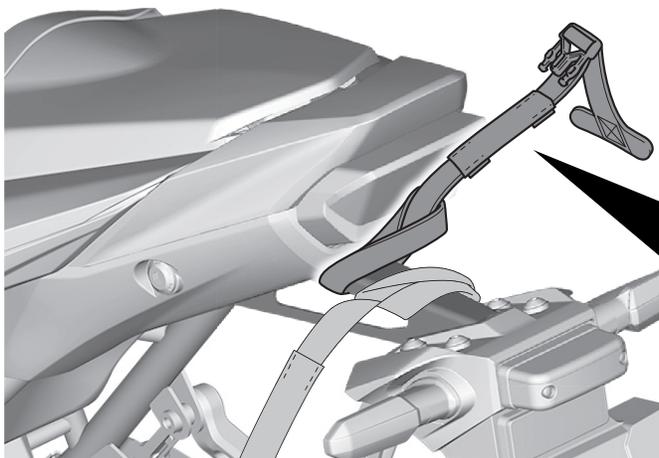


7. Install the motorcycle's parts in the reverse order of removal.


8. Install as shown.
- Repeat on the right side.
  - Tighten the straps while adjusting the balance between the right and left sides.
  - Secure well by pulling the straps tight.

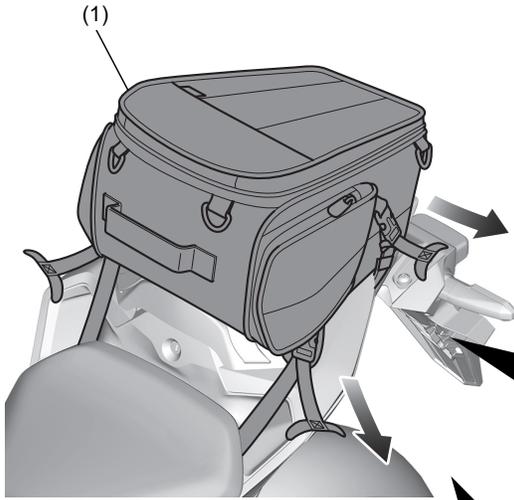

Install the protective belt to the position where it contact the cowl as shown.

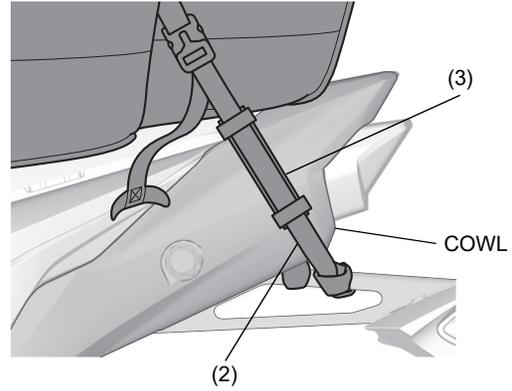

Wind the strap, and secure the strap end as shown.

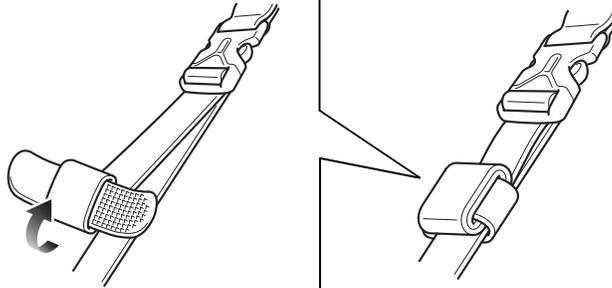

Make sure that the rear seat bag does not protrude to the tail light as shown.  
· If the rear seat bag protrudes, adjust the tensions of front strap and rear strap.

